

**VRLA / SLA Battery series** is designed with AGM Long life / Duration In High Performance Plate with Gain Extra Powder in Purify Electrolyte. Innovation Design of Fully Maintenance Free in Float Life 12 years. This is Highly Suited to Backup Applications in UPS/EPS, Security Alarm System, Deep Cycle Applications use in Telecom System and Solar System.

**Feature**

- Smart UPS Battery Design up to 10%
- Battery Capacity 150 Ah / 2500W - 15min
- AGM/SLA - Seal Lead Acid Battery
- Maintenance Free Battery Operation
- Non-Spillable Construction Design
- ABS container & Cover UL94HB-0
- Safety Value in explosion proof
- CE & UL Product Certification
- ISO9001 & ISO14001 Certified Factory

**Application**


- UPS & EPS
- Emergency System
- Communication Eq.
- Control Equipment
- Solar System
- Alarm System
- Medical Equipment
- Cable TV & CCTV




**Specifications**

Voltage Normal	: 12 VDC in 6 Cell
Capacity @20Hr	: 159Ah @7.94A/ 95W
@ 5Hr	: 127Ah @25.4A/ 291W
@ 1Hr	: 93Ah @92.6A/ 1038W
@15min	: 58Ah @233 A/ 2556W (*UPS)
@ 5min	: 33Ah @399 A/ 4284W (*UPS)
Max. Discharge	: 2000A @14C
Max. Charge Current	: 45A @0.3C
Internal Resistance	: Apporx. 4 mΩ Full Charge at 25°C
Design Float Life	: 12 years at 25 °C
Cycle Lift Service	: 1500 cycles at DOD 25%
Float Charge Voltage	: 13.5-13.8V (-20mV/°C) at 25°C
Cycle Charge Voltage	: 14.4-15.0V (-30mV/°C) at 25°C
Operation Temp.	: Normal 25+ / -3 °C
	: Discharge -15 – 50 °C
	: Charge -15 – 50 °C
	: Storage -15 – 50 °C
Self Discharge	: more than 6 Month at 25°C
Terminal	: M6
Container Material	: ABS UL94 HB-0 (Option :UL94V-0)
Physical	: 485x172x240mm – 44.5 Kgs

**Dimension 485x172x240mm Weight = 44.5kgs @M6**

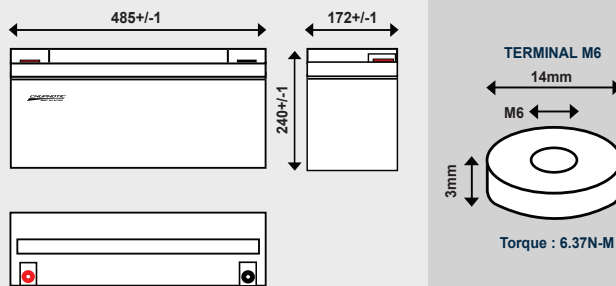




**Terminal Voltage (V) and Discharge Time**

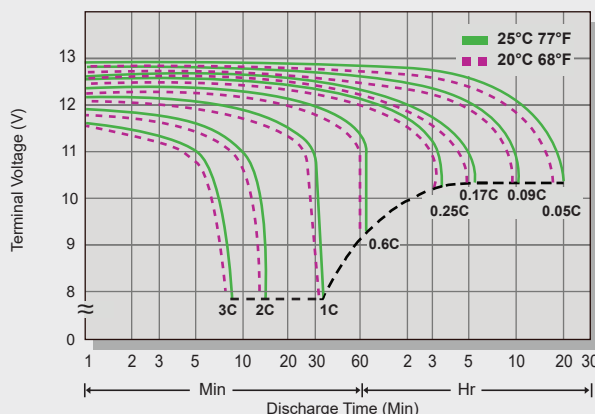

Battery Voltage and Charge Time for Standby Use

Battery Voltage and Charge Time for Cycle Use

Cycle Service Life

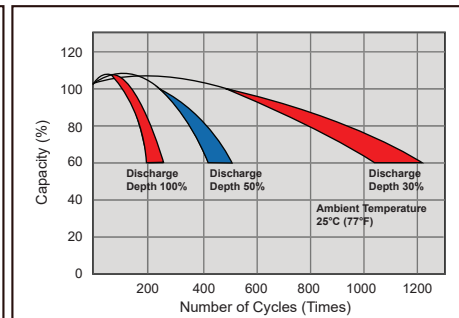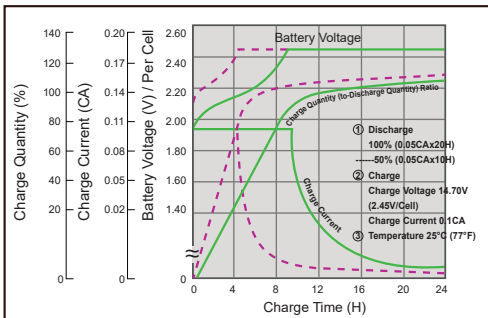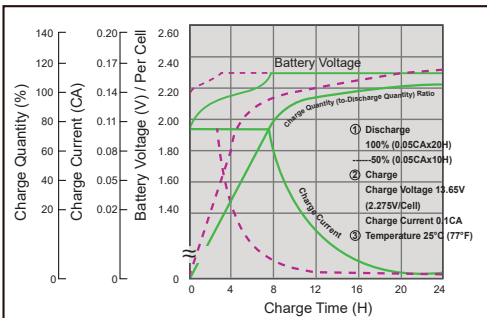

**Constant Current(Amp) and Power (Watt/Box) Discharge Table**

Chuphotic.BRO-11.BATT EX12150-2500W 12V-150Ah.Rev1.10/2019

**VRLA-Battery Performance : %DOD, Constant Current, Constant Power (25°C / 10.2 F.V.)**

Discharge Time	5 Min	10Min	15Min	20Min	30Min	60Min	2Hr	3Hr	5Hr	10Hr	20Hr
%DOD	22%	32%	39%	42%	49%	62%	70%	81%	85%	100%	106%
Cons. Current	399A	293A	233A	189A	147A	92.6A	52.5A	40.5A	25.4A	15.0A	7.94A
Cons. Power	4284W	3222W	2556W	2078W	1656W	1038W	603W	464W	291W	180W	95W

**CHUPHOTIC CO., LTD.**

949 Moo9, Sumrong-Nue, Muang-Samutprakarn, Samutprakarn 10270  
Tel: 02-186 3010 (Auto), Fax: 02-186 3018-9 [www.chuphotic.com](http://www.chuphotic.com)  
E-mail: [e\\_waveups@energywave.co.th](mailto:e_waveups@energywave.co.th) [www.energywave.co.th](http://www.energywave.co.th)

