

# String Inverter Grid Connected

## SUN SGS Series (40~50kW)

- >> High efficiency, up to 99.0%
- >> Easy monitoring
- >> Advanced design for reliability assurance
- >> 4 MPPTs for maximum flexibility
- >> Film capacitors for higher reliability



### Efficient and flexible:

- >> Wide MPPT range 300~950V
- >> Peak efficiency up to 99.0%, transformerless
- >> 4 MPPTs with 3 inputs each, MPPT achieve 99.9%
- >> 0-90° Mounting orientation for lay on roof installs

### Excellent Performance:


- >> Power factor adjustable ( $\pm 0.8$ )
- >> Grid-friendly with LVRT and accept grid dispatching
- >> NEMA 4X outdoor application
- >> Operating temperature range, -25~65°C
- >> Up to 1.5:1 PV power to inveter load
- >> Anti-PID function for option

### High Reliability:

- >> Double working power double resource supply for redundant
- >> DC reverse connection & AC short circuit protection
- >> Sensitive current leakage protection
- >> DC & AC lightning protection
- >> DC reverse current protection
- >> Arc-Fault circuit protection
- >> Integrated AC & DC disconnect switches

### User Friendly:

- >> RS485/Wi-Fi/SNMP/USB for option, easy monitoring
- >> Plug and play connection unit
- >> Wall mounted, quick installation and easy maintenance

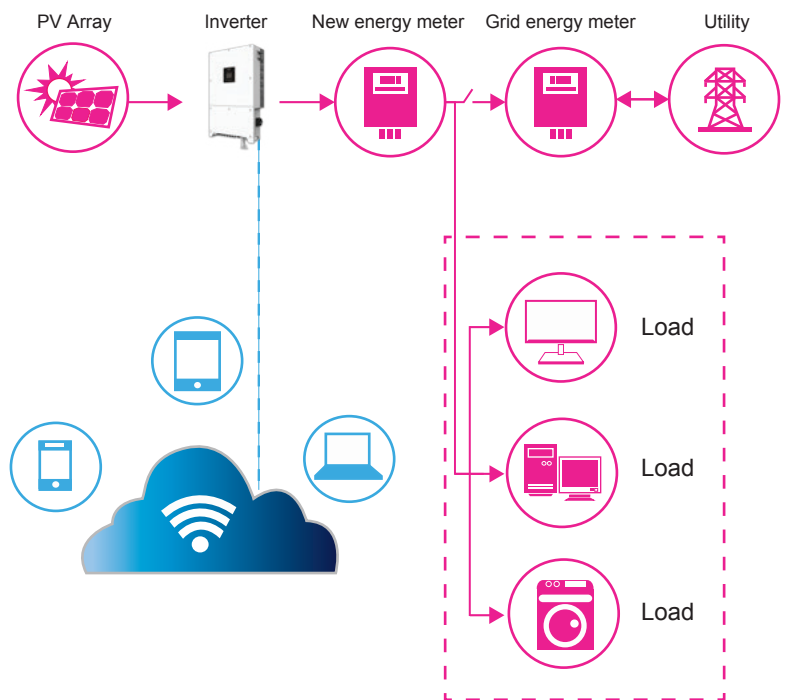

**Technical Specification:**

Items	SGS40K	SGS50K
<b>Input</b>		
Max.PV Power STC.(W)	60000	75000
Max.PV Input Voltage (Vdc)	1000	
Startup Voltage (Vdc)	250	
MPPT Voltage Range (Vdc)	300~950	
MPPT Voltage Range for Nominal Power	480~800	
No. of MPPTs	4 or 3	
Max. Number of PV Strings	4MPPTs , 12Strings , 120A, (MPPT x 30A x 3Strings)	
MPPT Efficiency	99.90%	
<b>AC Output</b>		
Nominal AC Output Power (VA/W)	40000	50000
Max. AC Output Power (VA/W)	44000	55000
Rated AC Output Current (A)	60(max)	76(max)
Nominal AC Voltage (Vac)	220V/380V, 230V/400V 3Ph	
Grid Frequency Range (Hz)	50Hz(45~55Hz), 60Hz(55~65Hz)	
THDi	<3%	
Power Factor	>0.99 @ Default value 0.8 leading - 0.8 lagging	
<b>Protection</b>		
Anti-islanding Protection(PID)	Yes	
LVRT/Ground Fault Protection	Yes	
Over/Under Frequency Protection	Yes	
AC Short Circuit Protection	Yes	
AC Leakage Current Fault Protection	Yes	
DC/AC Switch	Yes	
AC/DC Over current , Over/Under voltage	Yes	
PV Fault Detect	Yes(option)	
DC Lightning Protection (DC Surge)	Yes	
AC Lightning Protection (AC Surge)	Yes	
Over Temperature Alarm/Protection	Yes	
Operate Temperature range	-25°C~65°C	
Storage Temperature range	0~50°C	
Humidity	0~95%(Non-Condensing)	
<b>Indicator</b>		
LED	AC Normal, Abnormal, AC Current, DC Normal, Communication WiFi	
LCD(Real Time)	(DC Volt/Current), (AC Volt/ Current), Output Power, Daily kWh, Total kWh	
<b>General Data</b>		
Max. Efficiency	99.0%	
CEC Efficiency	98.0%	
Night Stand power consumption (W)	<1	
Ingress Protection	IP65(IP68 optional)	
DC connection type	MC4 Compatible Screw Terminals (optional)	
AC connection type	Waterproof Screw Terminals	
Safety	EN62109-1, EN62109-2, IEC62109-1, IEC62109-2	
EMC	EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4	
Grid Standard	France: UTE C15-712-1: 2013, DIN VDE 0126-1-1/A1: 2012/FR-20, ERDF-NOI-RES_13E:2013-06; NB/T32004-2013; UK: G59/3-2:2015; Thailand: PEA	
Cooling Concept	Nature cooling, Cooling fan	
Noise Emission	<55dB	
Dimensions (WxHxD)(mm)	26.3"X39.4"X10.8"in/600X1000X275mm	
Weight (kg)	65kg	68kg
Communication / Internet / Ethernet	RS485, Wifi (Option), GPRS (Option)	

\*Product specification are subject to change without further notice.

Chuphotic.BRO-37.SUN SGS Series 40-50kW.Rev 2.20/2019

**บริษัท ซูฟอทิก จำกัด**

949 หมู่ 9 ต.สำโรงเหนือ อ.เมืองสมุทรปราการ จ.สมุทรปราการ 10270

โทรศัพท์: 02 186 3010 แฟกซ์: 02 186 3018-9

www.chuphotic.com

E-mail: ups@chuphotic.com

ตัวแทนจำหน่าย :